INSTRUCTIONS FOR USE:

When the dispenser is receiving power, the LED will flash GREEN and RED to let your know it is functioning. When in standy, the LED will flash GREEN every five seconds.

Open front cover and press ON / OFF to turn the dispenser on or off. (ON:the LED will flash GREEN; OFF: the LED will flash RED).

Press the button, the LED will flash GREEN once to indicate that the signal is received, the LED will be in GREEN and the dispenser will discharge one dose when you trip the sensors.

Press the obbutton, the LED will flash GREEN twice to indicate that the signal is received, the LED will be in GREEN and the dispenser will discharge two doses when you trip the sensors.

When use at first time, trip the sensors underneath with the hand $5\sim 8$ times, the liquid can be discharged normally after the air is exhausted.

The soap dispenser is not working when the cover is opened. Please close the front cover after adjusting the liquid discharge position.

- 1. When the dispenser is powered on or the dose is adjusted, LED will flash GREEN 1 or 2 times continuously.
- 2. The LED will flash GREEN every five seconds when in standby.
- 3. The GREEN LED will light up when the dispenser is discharging doses
- 4. The LED will flash RED when battery is in low power; The LED will flash RED and GREEN at same time when battery is in deep low power.
- 5. The LED will flash GREEN and RED alternately when the dispenser senses abnormalities, such as: filter clogging, power exhaustion, no liquid discharge, etc.. If the abnormality is eliminated, shut down and restart to return to normal
- 6. The LED wil flash GREEN continuously when there is an obstacle below the dispenser, remove the obstacle to return normal.

Thank you for choosing the dispenser. May it bring convenience to your future life





PRODUCT SIZE:



123mm



Model: YK1208










Model: YK1808

高高


Dispensing: Spray



114mm

INSTALLATION NOTES:

When installing, please keep below space of dispenser at least 30CM. Choose a suitable place to install machine, do not let the dispenser get wet.

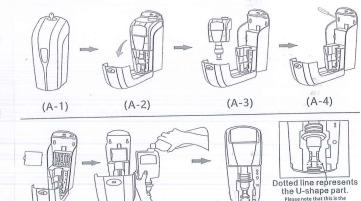

Insert the key into the corresponding hole of dispenser. (A-1) pressing down on key hole and swinging cover down. (A-2)

(A-6)

According to the screw hole position on the bottom shell, use pen to mark, fix screws and then hang dispenser. (A-4)

(A-8)

(A-7)

Open the battery compartment cover and insert 4 or 8 AA alkaline batteries correctly. (A-5)

Pour liquid into the bottle (Must remove bottle to add liquid). (A-6)

Put the bottle into the dispenser vertically and parallel. (A-7)

Pump head need to be locked in the correct position of U-shape part. (A-8)

SPECIFICATIONS:

(A-5)

Remove bottle. (A-3)

If you choose the dispenser of gel/liquid (YK1008), please refer to the following instructions

NAME:	Automatic liquid soap dispenser
MODEL:	YK1008
INDUCTION WAY:	infrared reflection
INDUCTION DISTANCE:	the shortest 3CM the longest 10 ± 2CM
MATERIAL:	ABS、PP
CAPACITY:	1000ml
REFILLABLE LIQUID:	milky liquid (such as: shampoo, shower gel, hand soap, etc.)
DISPENSING:	gel/liquid
DOSE:	():0.8ml ()(:1.6ml
BATTERY:	4 or 8 AA alkaline batteries
POWER ADAPTER:	Input voltage AC100~240V 50/60Hz Output voltage: DC6.0V 2A(Optional, it is not included by default

If you choose the dispenser of foam (YK1208), please refer to the following instructions

NAME:	Automatic foam dispenser
MODEL:	YK1208
INDUCTION WAY:	infrared reflection
INDUCTION DISTANCE:	the shortest 3CM the longest 10 ± 2CM
MATERIAL:	ABS, PP
CAPACITY:	1000ml
REFILLABLE LIQUID:	foam soap
DISPENSING: ∀	foam
DOSE:	():0.8ml ()():1.6ml
BATTERY:	4 or 8 AA alkaline batteries
POWER ADAPTER:	Input voltage AC100~240V 50/60Hz Output voltage: DC6.0V 2A(Optional, it is not included by default

INSTRUCTIONS FOR CLEANING OR REPLACING THE FILTER

This content applies: Foam soap dispenser, it is recommended to clean or replace filter accessories in the following cases:

- 1-No foam or little foam
- 2-Stop for one week after use
- 3-Used for more than 3 months
- 4-The LED flashes RED and GREEN continously, check if the filter is blocked

/ CAUTION


- O not expose to sunlight to avoid product deformation
- O Do not use the dispenser violently, it will damage the product
- Remove the battery and pour out liquid when not used for a long time
- Please clean the product regularly
- O not rinse with water, it will damage the product
- O Do not drop or hit the product on purpose
- O Do not use strong corrosive chemical solvents to clean the product, which will damage and deform the product surface
- O Do not allow dust to enter the soap bottle The pump may be blocked. If you find that the inside of the bottle is dirty, please replace the soap solution and clean the pump
- Never dismantle, repair, modify, etc. without, permission Can cause product failure For repairs, please consult our customer service.
- O Do not pour corrosive chemicals, etc
- Neep away from fire

If you choose the dispenser of spray (YK1808), please refer to the following

NAME:	Automatic hand disinfection dispenser
MODEL:	YK1808
INDUCTION WAY:	infrared reflection
INDUCTION DISTANCE:	the shortest 3CM the longest 10 ± 2CM
MATERIAL:	ABS, PP
CAPACITY:	1000ml
REFILLABLE LIQUID:	Special hand sanitizing liquid (Or medical disinfection alcohol, 75% alcohol content)
DISPENSING:	mist spray
DOSE:	(0.4ml (0.8ml) (0.8ml) (0.8ml)
BATTERY:	4 or 8 AA alkaline batteries
POWER ADAPTER:	Input voltage AC100~240V 50/60Hz Output voltage: DC6.0V 2A(Optional,it is not included by default

BATTERY INSTALLATION STEPS:

Remove the bottle, open battery compartment and insert 4 or 8 AA alkaline







2 Remove the battery compartment cover



③ Insert batteries

tweezers or other tools

the original order

1-Remove the bottle

2-Pull out the front housing of the

ends of the filter and replace it in

5-Assemble the front housing in place

- 3-Remove the filter by hand, 4-Clean the dirt remaining on both

 - diagram
 - Pump assembly Enlarged diagram

· filter

Pump assembly diagram

PRODUCT WARRANTY INSTRUCTIONS

The company ensures the products shipped from the factory meet the relevant safety standards and technical requirements, which can display all functions under normal use and maintenance.

Within one year from the date of purchase, it is confirmed by our maintenance personnel that the failure is damaged due to manufacturing processes or materials, then the warranty is free.

For one of the following reasons, you can not enjoy the free warranty service terms of our company during the warranty period:


- Product damage caused by incorrect use
- Product damage caused by incorrect installation
- Product damage caused by customer's unauthorized modification
- ♦ Natural disasters and man-made damage

The company only performs product after-sales maintenance services with valid tickets and corresponding product warranty cards.

Do not expose the product to moisture or water

Once the product is sold, do not accept any returns unlelss it is quality

COMPONENT DESCRIPTION:



6 Pump





Screw hanging hole

(17) Sensor light

(18) Outlet



- ② Visible window ⑦ Front cover
- ① Twice button (B) ON/OFF 3 Adapter socket 8 Bottom shell
- Bottle cap


(5) Bottle

- Battery
- 1 Internal unit 1 U-shape part

(11) Once button

(4) LED indicator (1) Key

USAGE EXAMPLE:



Induction distance: the shortest 3CM the longest 10 ± 2CM

